56Z-Meter • Truck-Mounted Concrete Boom Pump

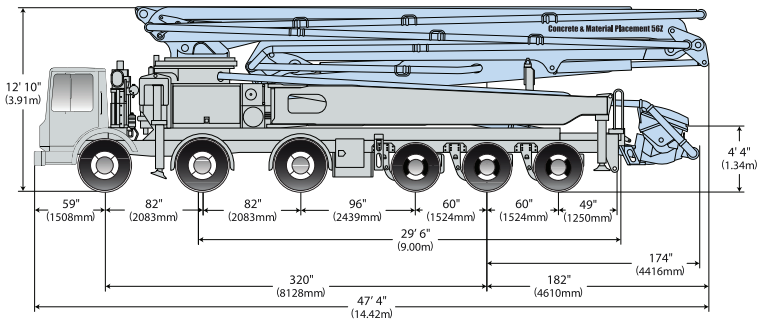

Model Overview

• Vertical reach	181'	(55.1m)
• Horizontal reach	163' 9"	(49.90m)
• Reach from front of truck	149' 7"	(45.60m)
• Reach depth	132' 3"	(40.30m)
• Unfolding height	40'	(12.20m)

Boom Specifications • Multi-Z Design

1st section length	34' 1"	(40.40m)
2nd section length	26' 8"	(8.12m)
3rd section length	30' 6"	(9.30m)
4th section length	37' 8"	(11.48m)
5th section length	38' 9"	(11.80m)

Outrigger Loads • Front and Rear

FRONT
67,443 lbs
300 kN

REAR
70,815 lbs
315 kN

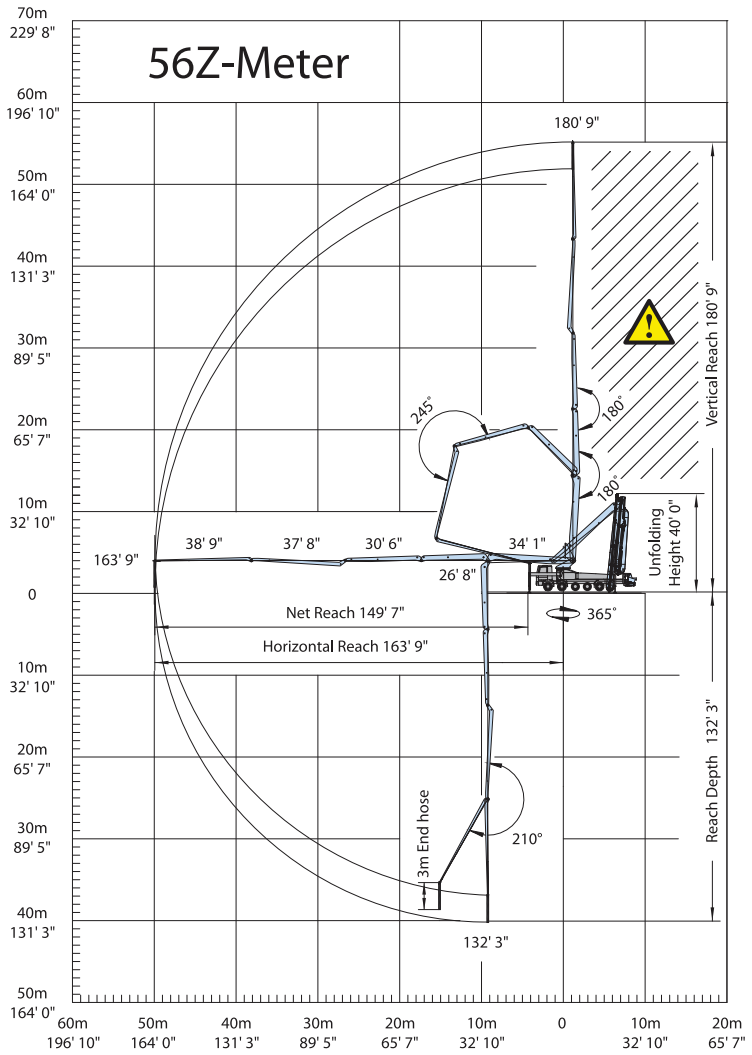

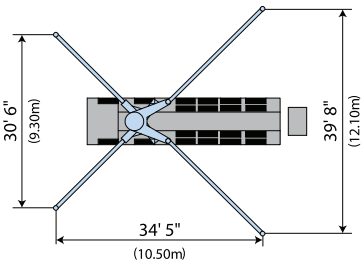



End hose not to be operated in caution area.

CONCRETE & MATERIALS PLACEMENT